




SMART VENUE ACCESS

SMART BLE EMLOCK

SIMPLICITY

IS THE NEW NORMAL

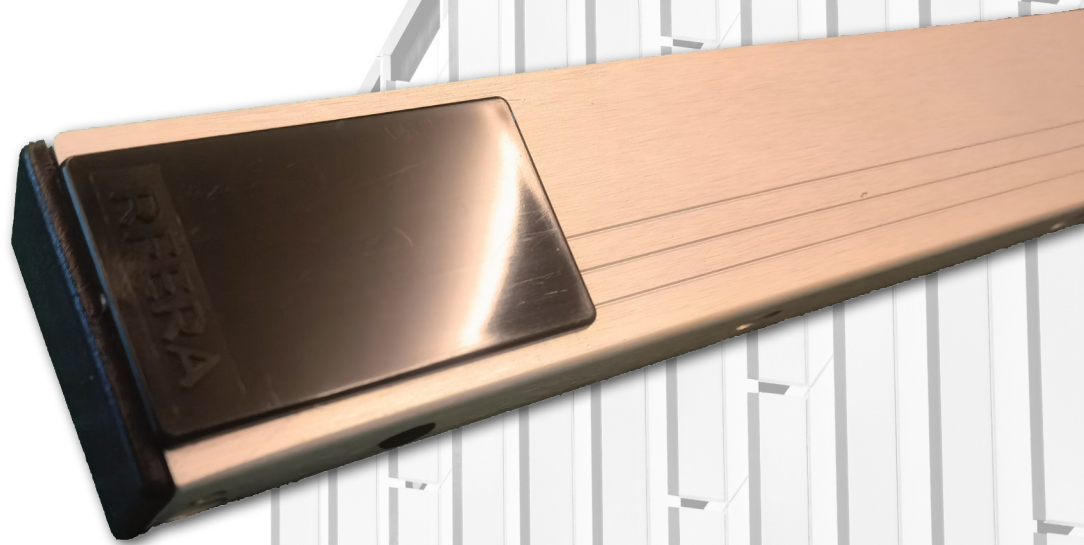

High Security

Secured BLE communication between the Smart Emlock and mobiles app



Keyless Opening

Secured open with smart app on users' phone. No physical card required



Easy Management

User accessibility is remotely granted to user mobile phone, no on-premise server is required




Low Maintenance

Easy to install and low maintenance, bespoke solution for remote locations management & operation


SYSTEM ARCHITECTURE

STANDALONE MODE

ONLINE APPLICATION

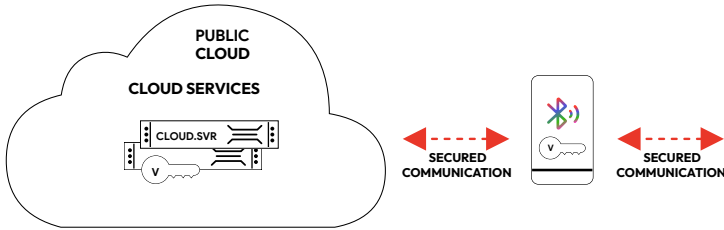

EDGE LOCKING SETUP

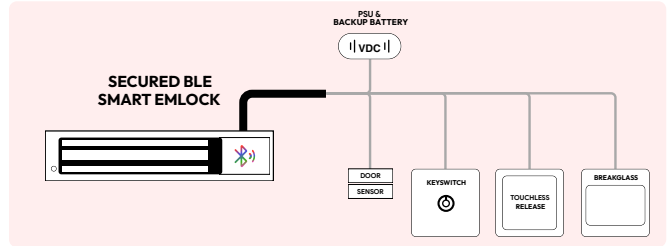

TECHNICAL SPECIFICATION

Operation Mode	Standalone/Connected with Mobile App
Digital Input	2 (Door Sensor / Exit Button)
Visual Indicator	LED Indicator
Audio Indicator	On-board Buzzer
Antenna	Onboard
Operating Frequency	2400MHz ~ 2483.5 MHz ISM Band
RF Tx / Rx	+14dB / -97dBm
Maximum Smart Lock Per Account	5
Maximum User Per Lock	20 (Upgradable)
Operating Power	12VDC

* Specification may change without prior notice